

DOUBLE SIDED SINGLE BLADE LOPPING MACHINE MOD. CBX 100-200

Double-sided lopping machine CBX100 to be applied frontally to an all-purpose tractor equipped with standard flanging and with hydraulic distributor for full control of all machine functions: Side movement (adjustable distance 60 cm), Tilt movement of the heads 25°, Hydraulic adjustment of blades height (cm 50)

Standard equipment:

2 Verticals bars of mt. 1.80 o mt 2.10 self-sharpening single-blade, Supporting trestle with wheels and Flanging system.



Supporting trestle with wheels



Flanging system



Third point coupling element

OPTIONAL



joystick

OPTIONAL



Horizontal bar with mechanic inclination dx

OPTIONAL



Shoot conveyor for vertical bars

OPTIONAL




Hydraulic system 50 L oil, capacity 40 L/Min.

OPTIONAL

VIEW

CBX 100 Min.110 Cm - Max.170 Cm
CBX 200 Min.130 Cm - Max.230 Cm

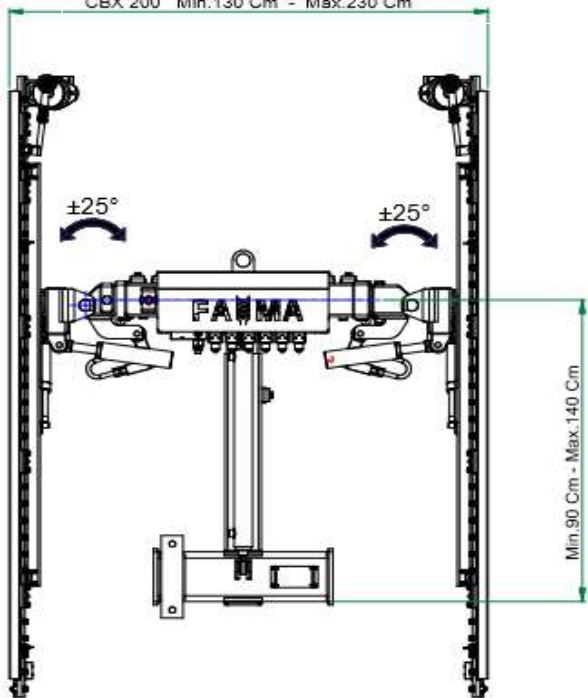

Kg 320



Frame was designed for maximum visibility for the driver of the tractor



Monolama



Bilama



Scan for video

Rivenditore - Dealers - Revendeur - Händler



find us on Facebook - FAMAPRUNING