

IN ROW GRASS TRIMMER MOD. ECO TRIMMER

In row machine with $\varnothing 4$ mm wires and 3 points rear frame, to remove the grass from the inter-row without damaging the plant, best for orchards and vineyards.

Rapid work thanks to the high speed of the roll and the mechanical moving system guaranteed by an adjustable spring



Kg 240

“ECO TRIMMER 1” Model: Frame with 3 points connection with hydraulic cylinder for the header stroke translation 50 cm, 3 stabilizing wheels adjustable in height, heater exchanger, header inclination control for leveled operation based on the slope of the ground.



Independent hydraulic system for the powering of the roller motor. The translation and inclination controls of the header are moved by quick couplers connected to the tractor’s auxiliaries distributors.



Stability guaranteed by the 3 wheels system

ECO TRIMMER 2

Available in 2 versions

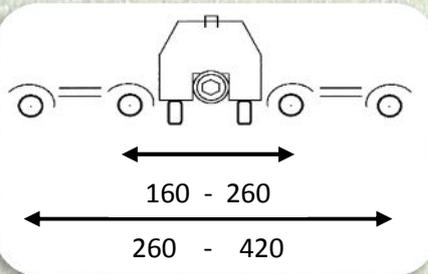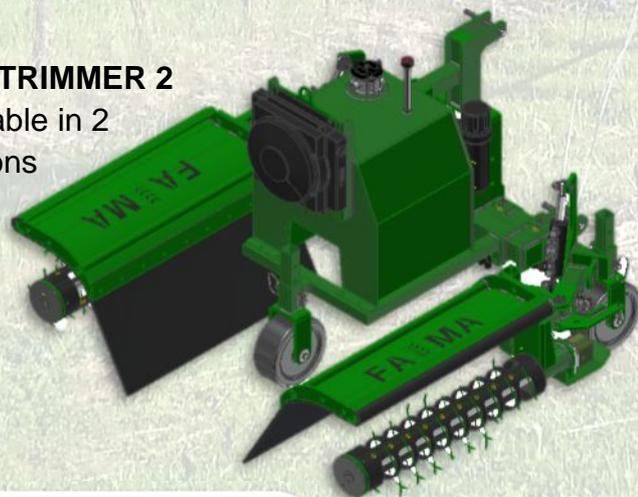

Post cleaning



Not cleaned



Header inclination of 60°



ECO TRIMMER "SPECIAL" Model: Version with out pipes that make the roll's translation. Frame with 3 points connection with hydraulic cylinder for the header stroke translation, 2 stabilizing wheels adjustable in height, heater exchanger.



Roller with 9 reels of 9 MT of wire Ø 4 mm



Scan for video

Rivenditore - Dealers - Revendeur - Händler



find us on Facebook - FAMAPRUNING