

LOPPING MACHINE CR/U 350

There is applied to tractor with front hosting device or with standard flanging.

Lopping machine with knives for lopping the vineyards. equipped with hydraulic distributor for full control of all machine functions: Side movement (50 cm), Tilt movement (25°), Height adjustment of cutting blades (50 cm), Distance adjustment between the two vertical bars.

Standard equipment:

- 2 vertical bar with 6 blade(length of each blade 35 cm), total length of the bar mt 1,90
- 1 horizontal bar with 3 blade mt 0,90
- Supporting trestle with wheels
- Flanging system



OPTIONAL

Cutter sylvose with hydraulic motor Inc.(45°)



Supporting trestle with wheels



Flanging system



OPTIONAL

Shoot conveyor for vertical bars




OPTIONAL

Hydraulic system for tractors



OPTIONAL

Third point coupling element

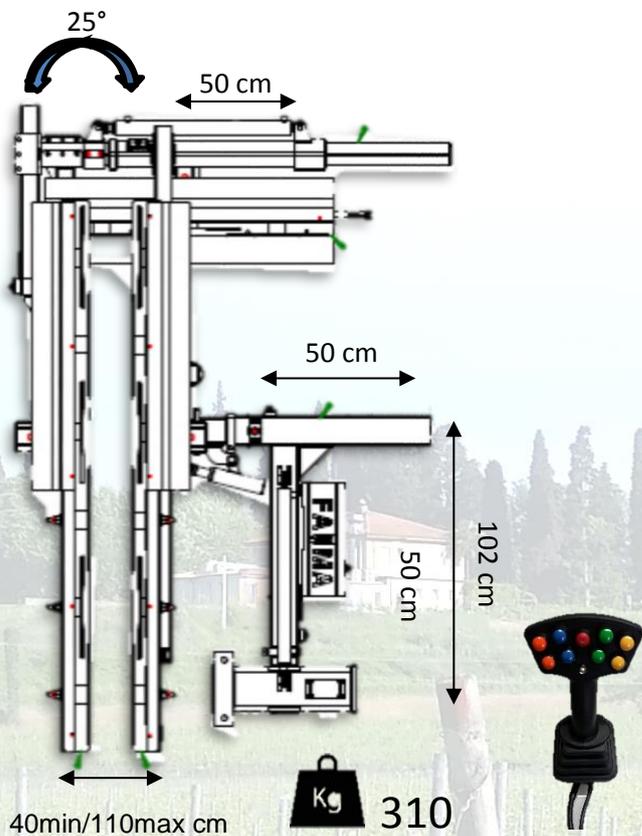

OPTIONAL

Hydraulic inclination of the vertical bar (RIGHT)



OPTIONAL

Hydraulic inclination of the vertical bar (LEFT)



Hydraulic lifting of the vertical bar (LEFT)

OPTIONAL




Hydraulic topping height adjustment

OPTIONAL

MODELLI DISPONIBILI

Vertical bar with 4 blade	130 Cm
Vertical bar with 5 blade	160 Cm.
Vertical bar with 6 blade	190 Cm.
Vertical bar with 4 blade + 1 blade	130 Cm. + 35 Cm
Vertical bar with 5 blade + 1 blade	160 Cm. + 35 Cm
Vertical bar with 6 blade + 1 blade	190 Cm. + 35 Cm
Topping 3 blade	95 Cm
Topping 2 blade	70 Cm.
Topping 4 blade	130 Cm.

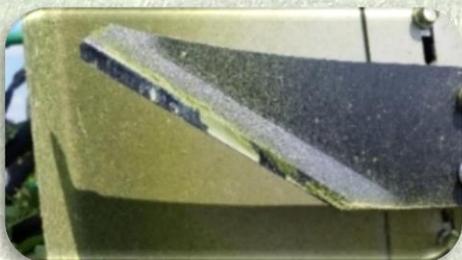

Scan for video

Rivenditore - Dealers - Revendeur - Händler



find us on Facebook - FAMAPRUNING