

PRUNING MACHINE MOD.CKP 250

Pruning machine CKP 250 for fruit trees to be applied to an all-purpose tractor equipped with front hoisting device or with standard flanging and with **hydraulic distributor** for full control of all machine functions: Side movement (50 cm), Tilt movement (25°), Height adjustment of cutting blades (50 cm).

It makes use of the hydraulic system of the tractor (minimum pump requirement: 55 l).

Standard equipment:

Supporting trestle with wheels

Flanging system



Supporting trestle with wheels



Universal flange with two modes of connection



Wheel saves hail nets



Third point coupling element



joystick



Hydraulic system to be applied to an all-purpose tractor



Hydraulic system for tractors



Electric control distributor allowing n. 5/7 movements

OPTIONAL

OPTIONAL


OPTIONAL

OPTIONAL

OPTIONAL

OPTIONAL

OPTIONAL

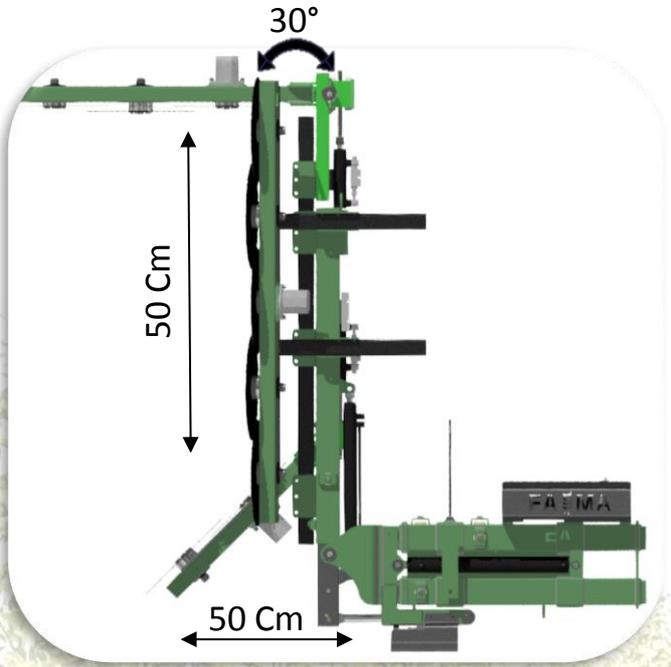

Kg 520



CKP2BV. Looping machine with 2 vertical cutting planes (2 + 1 Mt.)

AVAILABLE!


- CKP 210 Vertical Bar 2.10Mt
- CKP 250 Vertical Bar 2,50Mt.
- CKP 300 Vertical Bar 3Mt
- Topping Horizontal superior bar 86/116/150 Cm.
- Horizontal lower bar 50/70/85 Cm.



Finger SCH



Bracket vertical bar revolving

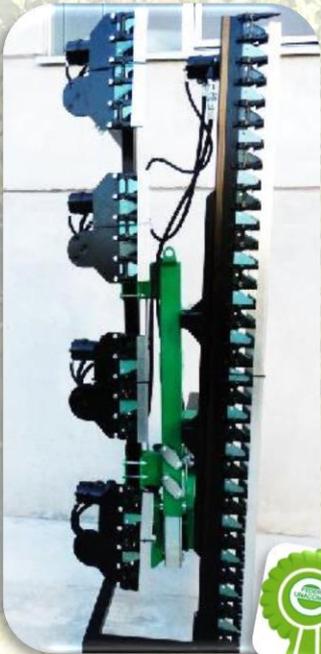

Horizontal lower with hydraulic inclination



Topping horizontal superior bar with inclination



Topping horizontal bar 1.50 m long equipped with shockproof spring and with cylinder for hydraulic return

Windows for pruning machine **PATENTED**



Scan for video

Rivenditore - Dealers - Revendeur - Händler



find us on Facebook - FAMAPRUNING